



## 2.5 PANEL LAUTEX UP-150

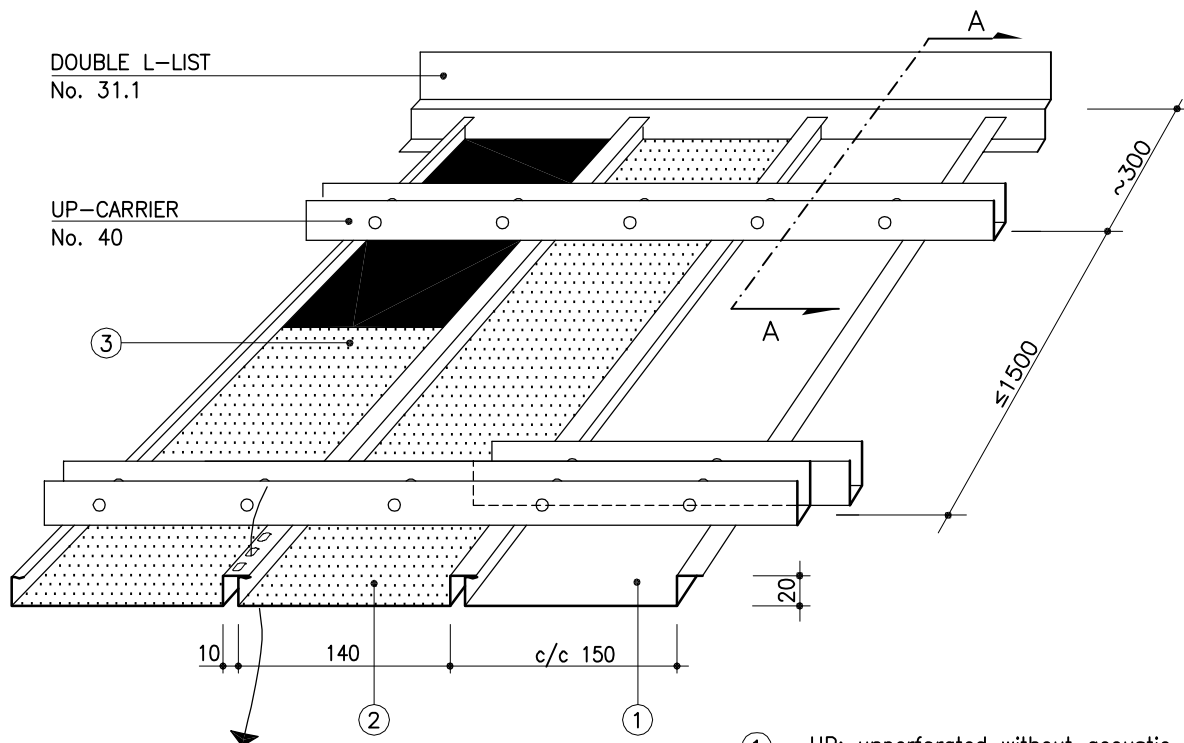

- ① = UP; unperforated without acoustic inlay
- ② = UPR; perforation on the bottom
- ③ = UPRT; perforated, acoustical felt

VENTILATION HOLES ACCORDING TO ORDER  
 $5 \times 7 \text{ mm c/c } 13.0 \text{ mm} = 2279 \text{ mm}^2/\text{rm}$

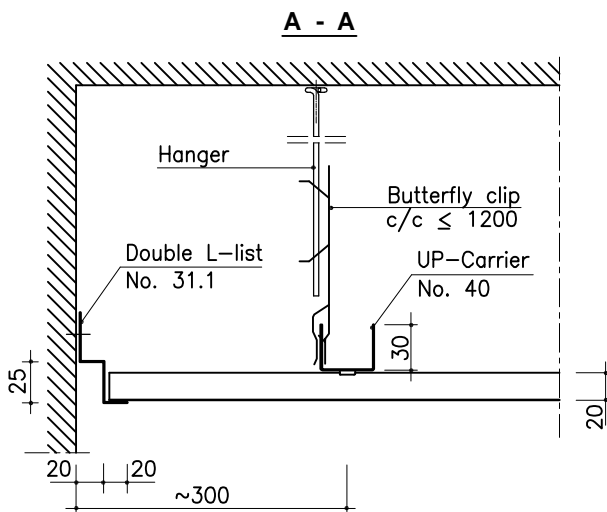

### STANDARD UP-150 PANELS

Material	0.5 mm Al
Width	150 mm
Height	20 mm
Length	1250-6500 mm
Perforation	∅2.0 mm
Inlay	acoustical felt
Finish	stove enamelled

### OTHER ALTERNATIVES

Material	0.7 Al, 0.5 mm Fe
Length	< 1250 mm
Perforation	∅ 3.5 mm
Inlay	wool in plastic
Finish	high gloss anodized (Al)
Other special solutions	Please, contact our technical information department.

STRUCTURAL DETAILS SEE LEAFLET 6.1

All products are subject to modifications without prior notice.  
 2001



# OY LAUTEX AB

P.O. Box 58 FIN-03101 Nummela Finland  
 Tel +358 (0)9 224 8810 Fax +358 (0)9 222 5447  
 E-mail: sales@lautex.com www.lautex.com

